





Shelter consisting of a series of cantilevered columns made of 80x80x3 mm square steel tube with a 15 mm thick steel sheet base plate topped by a 1.2 mm thick steel sheet cover suitably sealed with a self-expanding adhesive gasket. The rear walls are made of 10 mm thick honeycomb polycarbonate equipped with suitable gaskets and glazing beads while the seat is made of 8 30x2 mm steel tubular bars welded to the appropriate brackets of 80x40x2 mm rectangular steel tubing. On request, the shelter can be supplied with a side wall in 40x40x1.5 mm steel tubing filled with 10 mm thick honeycomb polycarbonate. On request the toponym can be customised with adhesive graphics.

All metal parts are galvanised and coated with thermosetting polyester powder.


All fixings are in AISI304 stainless steel.

Prepared with holes \varnothing 18 mm for fixing to the ground with M16 threaded bars and chemical concrete (not included) or special anchor bolts supplied on request.

technical data

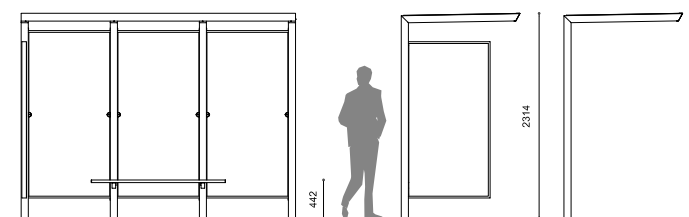

3200x1393 mm
H 2314 mm h 442 mm



Galvanised and powder coated steel
Honeycomb polycarbonate



Prepared with holes \varnothing 18 mm for fixing to the ground with M16 threaded bars and chemical concrete (not included) or special anchor bolts supplied on request

